
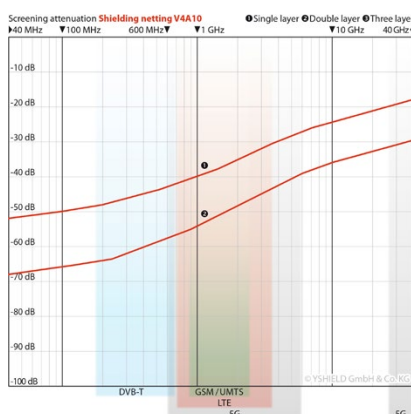
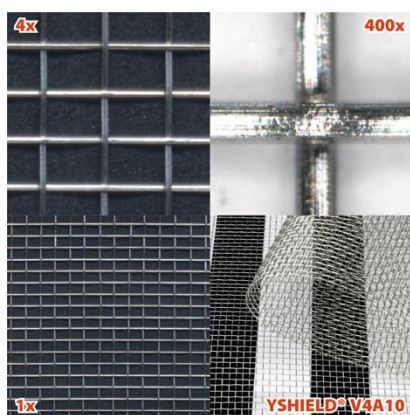


V4A10 - Stainless steel gauze V4A (HF+LF)

OUR RECOMMENDATION

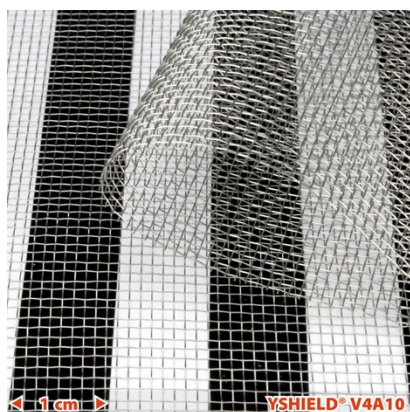

Characteristics

V4A10 is a **finely woven, noncorrosive stainless-steel gauze** for the shielding of high-frequency radiation (HF) and low-frequency electric fields (LF).

Application

For the interior and exterior **under-plaster in upgraded insulations, in roof areas, at drywall constructions, as flyscreen, loosely laid, etc.**

V4A (AISI 316) is resistant against water, water vapor, air humidity, mild acids and in coastal areas against salty seawater!

Technical data

- **Width: 90 cm**
- **Length: By the meter / 25 m roll**
- **Attenuation: 40 dB, two-layer 55 dB**
- **Mesh width: 1.0 mm, wire diameter: 0.16 mm, material thickness: 0.32 mm, open area 70 %**
- **Weight: 280 g/m²**
- **Color: Silver**
- **Fire-proof material, A1 according DIN 4102:1994**
- **Surface conductivity: 0.1 ohm (square resistance R_□)**

Processing

In case processing the V4A10 under plaster you should work with a preferably fine and organic filler. Under floor coverings (laminat, parquet, PVC coating, etc.) V4A10 is being fixed with the adhesive used for the floor covering. For drywall construction and in roof area the mesh elements can be bolt or stapled together. **The rule is:** Always overlapp the single elements at least 5 cm. For grounding use the perforated stainless steel tape ELB by screwing it right across the elements into the surface.

Grounding

Due to the highly conductive surface this material can be **contacted and grounded easily to shield low frequency (LF) electric fields.**

Screening attenuation

The screening attenuation is **regularly tested in our own EMC laboratory.** We have measurement setups due to the following standards: **ASTM D4935-10, IEEE Std 299-2006, IEEE Std 1128-1998, ASTM A698/A698M-07.** Please find the test report at our homepage directly on the product page.

Paints

Sheet products

Fabrics

Textile products

Canopies

Grounding

Measurement

Electro

Prices