

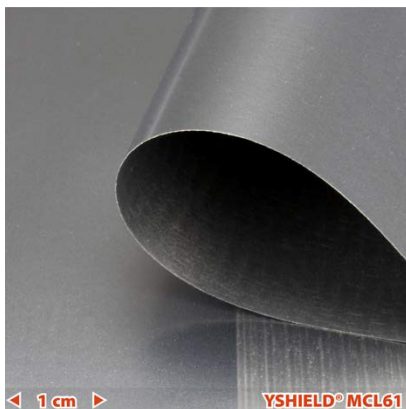


MCL61 - Magnetic shielding film (LF)

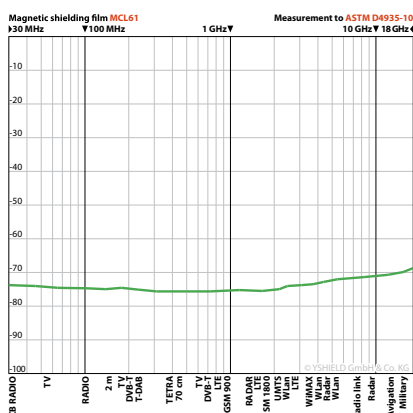

YSHIELD® MCL61

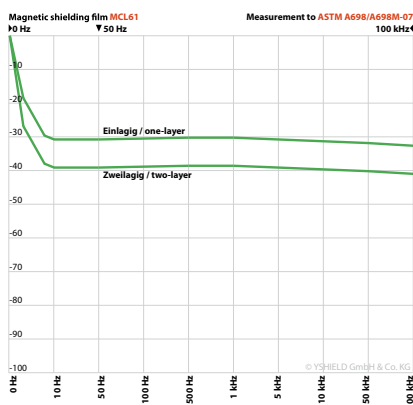

Characteristics

MCL61 is our **novel magnetic shielding film made from an amorphous cobalt alloy** for the shielding of low-frequency **magnetic alternating fields**. Also shields low-frequency electric alternating fields (LF) and high-frequency fields (HF).

In comparison with MUMETALL® our new MCL61 has many advantages:

MUMETALL® is soft and sensitive, on bending, to shocks and on processing it loses the attenuation very fast. The cobalt strips in our MCL61 are **flexible but hard** even at small bending radii. The attenuation remains constant even at high mechanical stress. Because the cobalt strips are only 20 µm thin, 50 mm width and sharp like a knife, we **lamine it for protection**. Due to the lamination MCL61 is corrosion-resistant even in humid environments. With a **width of 61 cm** big areas are shielded faster compared to 15 cm width MUMETALL®-strips. MCL61 can easily be cut with scissors.

Technical data

- **Width: 61 cm**
- **Length: By the meter / 20 m rolls;** Because of the high production costs, we allow to divide up the ordered quantity!
- **Attenuation LF magnetic field: 30 dB (97 %);** The attenuation depends on the number of phases, cable twisting, the size of the area, etc.; Work in large areas: Shield cables with 1-2 sheets, fuse-boxes with 2-4 sheets;
- **Attenuation HF: 75 dB**
- **Weight: 265 g/m²; Material thickness: 0.1 mm; Color: Silver**
- **Materials: Polyester, Co69, Fe4, Mo4, Nb1, Si16, B7**

Magnetic properties

- Permeability: $\mu_2 = 10,000$; $\mu_4 = 25,000$; $\mu_{max} = 100,000$
- Saturation polarization B_s : 0.55 T
- Coercive field strength H_c : 0.5 A/m
- Remanence B_r/B_s : 0.7
- Curie temperature T_c : 225 °C

Processing

Warning: The cutting edges are sharp like a knife! **Important:** Its difficult to glue the film free of creases, best cover the area with solid wall coverings. **Wall, ceiling, floor:** Best use a high-viscous assembly adhesive, that adheres to non-absorbent substrates. Smooth the glue, lay up the film, smooth with a pressure roller or squeegee. The sheets of MCL61 should be overlapped, level out the overlappings, paint it over with any commercial synthetic dispersion paint. Please pay attention that the film is a water vapour barrier on wall areas!

Grounding

MCL61 is electrically isolated. To ground it, every strip has to be screwed with a **chopper disk**, that penetrates the polyester film. The **grounding set MCL** contains all for 10-20 strips.

Screening attenuation

The screening attenuation is **regularly tested in our own EMC laboratory**. We have measurement setups due to the following standards: **ASTM D4935-10, IEEE Std 299-2006, IEEE Std 1128-1998, ASTM A698/A698M-07**. Please find the test report at our homepage directly on the product page.