

Shielded installation boxes

Cavity-wall box 59 mm D4461



Shielded with conductive vacuum coating. Connection wire 1.5 mm², solid, isolated. One gang box or switch box for plate thickness from 7-35 mm. Standard mounting distances.

Lamp connection box D4606



Shielded with conductive vacuum coating. Connection wire 1.5 mm², solid, isolated. Connection box for lamps. Diameter 35 mm, Depth 45 mm. Standard mounting distances.

Push-wire connector D4628



5 x 1.0 mm² up to 2.5 mm². Transparent. 50 pieces. Quick attachment.

Cavity wall box 47 mm D4483




Shielded with conductive vacuum coating. Connection wire 1.5 mm², solid, isolated. One gang box or switch box for plate thickness from 7-35 mm. Standard mounting distances.

In-wall box 61 mm D4426



Shielded with conductive vacuum coating. Connection wire 1.5 mm², solid, isolated. With snap-lock coupling, as one gang box or switch box under plaster. Standard mounting distances.

Insulation sleeve D4685

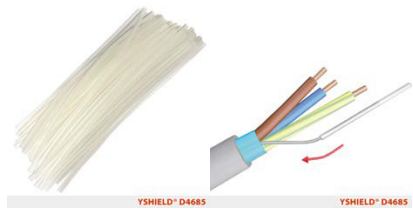

Length 10 cm. Transparent for drain wire. 100 pieces. For insulation of the blank drain wire of the installation cables.

Junction case D4505



Shielded with conductive vacuum coating. Connection wire 1.5 mm², solid, isolated. Junction casing for hollow or brick walls. 107 x 107 x 53 mm. Standard mounting distances.

In-wall box 41 mm D4448



Shielded with conductive vacuum coating. Connection wire 1.5 mm², solid, isolated. With snap-lock coupling, as one gang box or switch box under plaster. Standard mounting distances.