
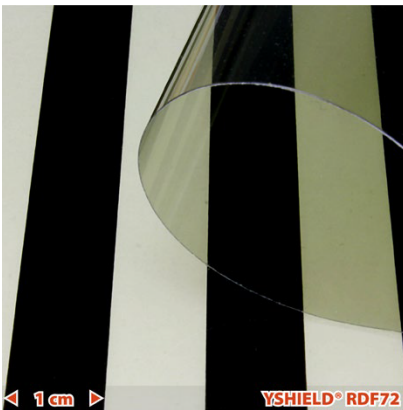


- Paints
- Sheet products
- Fabrics
- Textile products
- Canopies
- Grounding
- Measurement
- Electro
- Prices

RDF62, RDF72 - Window films (HF)

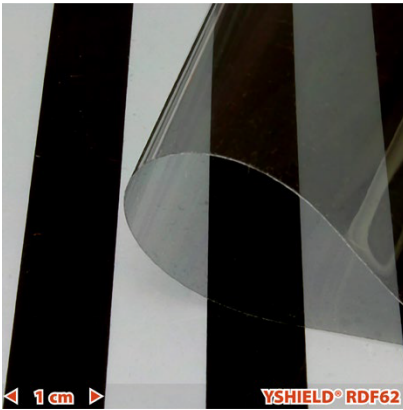

	RDF62-Clear	RDF72-Premium
Application	Interior	Interior
Application on heat-absorbing glass	Limited / depends on the glass	Limited / depends on the glass
Edge sealant necessary	No	Yes: FKV50
Light transparency	62 %	72 %
Color of daylight	Bright grey	Bright Green
Reflections from interior	Bright silver	None
Reflections from exterior	Bright silver	None

Characteristics

RDFxx are precious-metal coated and self-adhesive films for the shielding of high-frequency radiation (HF). ● **RDF62-Clear** has a perfect ratio between quality, light transmission, color of daylight and good attenuation. ● **RDF72-Premium** is our premium film consisting of 10 metal layers for highest quality demands. Unrivaled attenuation and a very high degree of light transmission.

Mounting accessories

The mounting requires craftsmanship skills and **professional accessories**:

- ❶ **Mounting concentrate FMK30** for wet bonding, 30 ml for 0.5 liter of water.
- ❷ **Plastic scraper FVR10** for a bubble-free bonding. With the both smooth edges the water and the bubbles can be pressed out, without scratching the film-surface.
- ❸ **Edge sealant FKV50**, 50 ml. This sealant has to applied to the edges of RDF72 about 8 weeks after it has been glued on.

Technical data

- **Width: 76 cm and 152 cm**
- **Length: By the meter, roll with 30 m**
- **Attenuation: RDF62 = 19 dB, RDF72 = 30 dB**
- **Material thickness: RDF62 = 37.5 µm; RDF72 = 75 µm**
- **Mounting: Water-activated, pressure-sensitive adhesive**

