
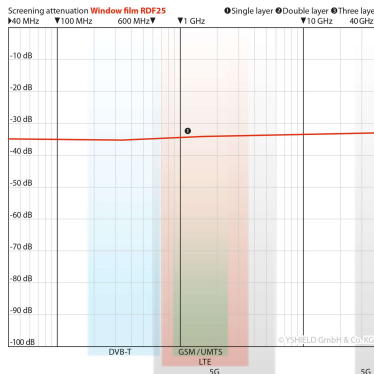


YSHIELD® RDF25 | Window film | Width 76 cm | 1 meter

Window film with 25 % light transmission in coppery. Attenuation 34 dB. Outdoor application even on heat absorbing glass surfaces.

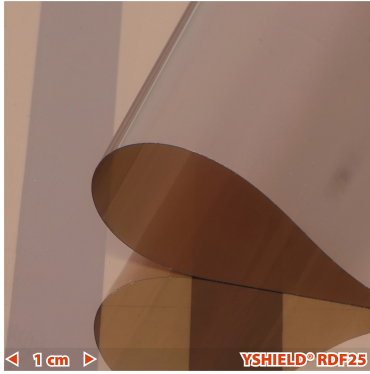

Properties

Precious metal coated and self-adhesive special window film for shielding of high-frequency radiation (HF). Window film with **25 % light transmission** in **brown**. Attenuation **34 dB**. **Outdoor application even on heat absorbing glass surfaces.**

Application

For the application you mandatory need our plastic scraper **FVR10**, the mounting concentrate **FMK30** and the edge sealant **FL4**, see our accessories below. An assembly instruction is included in the delivery. Please note: Do not apply the edge sealant until 8 weeks after installing the window film, so that excess water can evaporate!

Attenuation | Grounding

- This product shields **high frequency electromagnetic fields** (HF). The indicated dB-values apply to 1 GHz, view chart for other frequencies. Expert reports ranging from 40/600 MHz to 40 GHz according to standards ASTM D4935-10 or IEEE Std 299-2006, view report above.
- This product without an electrically conductive surface does not shield low-frequency alternating electric fields (LF).

Technical data

- **Width: 76 cm**
- **Length: Linear meter / 30 m roll**
- **Attenuation 34 dB at 1 GHz**
- **Light transmission: 25 %**
- Color of daylight: Brown.
- Mounting: Water-activated, pressure-sensitive adhesive to the back.
- Material thickness: 50 µm.
- **Indoor application only on non heat absorbing glass surfaces!** Background: Heat-absorbing glass is already metallized. When solar radiation permeates the metallization and subsequently hits the window foil, multi reflections may occur. The windowpane will needlessly heat up and thus by expansion cause leaks or even cracks in the border-seals. Check the type of glass in advance!
- **Outdoor application even on heat absorbing glass surfaces.** This window film is specially designed for outdoor application. The solar radiation is blocked, this is why the window cant heat up. This film is especially approved for thermal insulation glazing.